


MSU88-18G

The MSU88-18G is an 8x8 HDMI matrix switcher with full 18Gbps bandwidth and both analogue and digital audio De-embedding on each of its outputs. Each output can automatically downscale 4K to 2K where necessary to ensure that an image will be received on all Displays. The matrix has four methods of control: Front Panel, RS232, LAN or IR. A front panel locking feature helps prevent accidental operation.

FEATURES

- 8x8 HDMI 2.0 (18G) Matrix
- HDMI resolution up to 4K60 4:4:4 (18Gbps)
- Auto-scaling 4K to 2K per output
- HDCP 1.4 and HDCP 2.2 Compliant
- Supports HDR10, HLG, & Dolby Vision
- Extensive EDID & HDCP Management
- 8x Analogue + 8x Digital Coax audio outputs
- 8x Analogue audio inputs
- Control from Front Panel, RS232, LAN & IR
- Memory scene Pre-sets
- Test Pattern Generator - (Various Resolutions and Colours)
- Web Browser GUI

CONNECTIVITY ILLUSTRATION

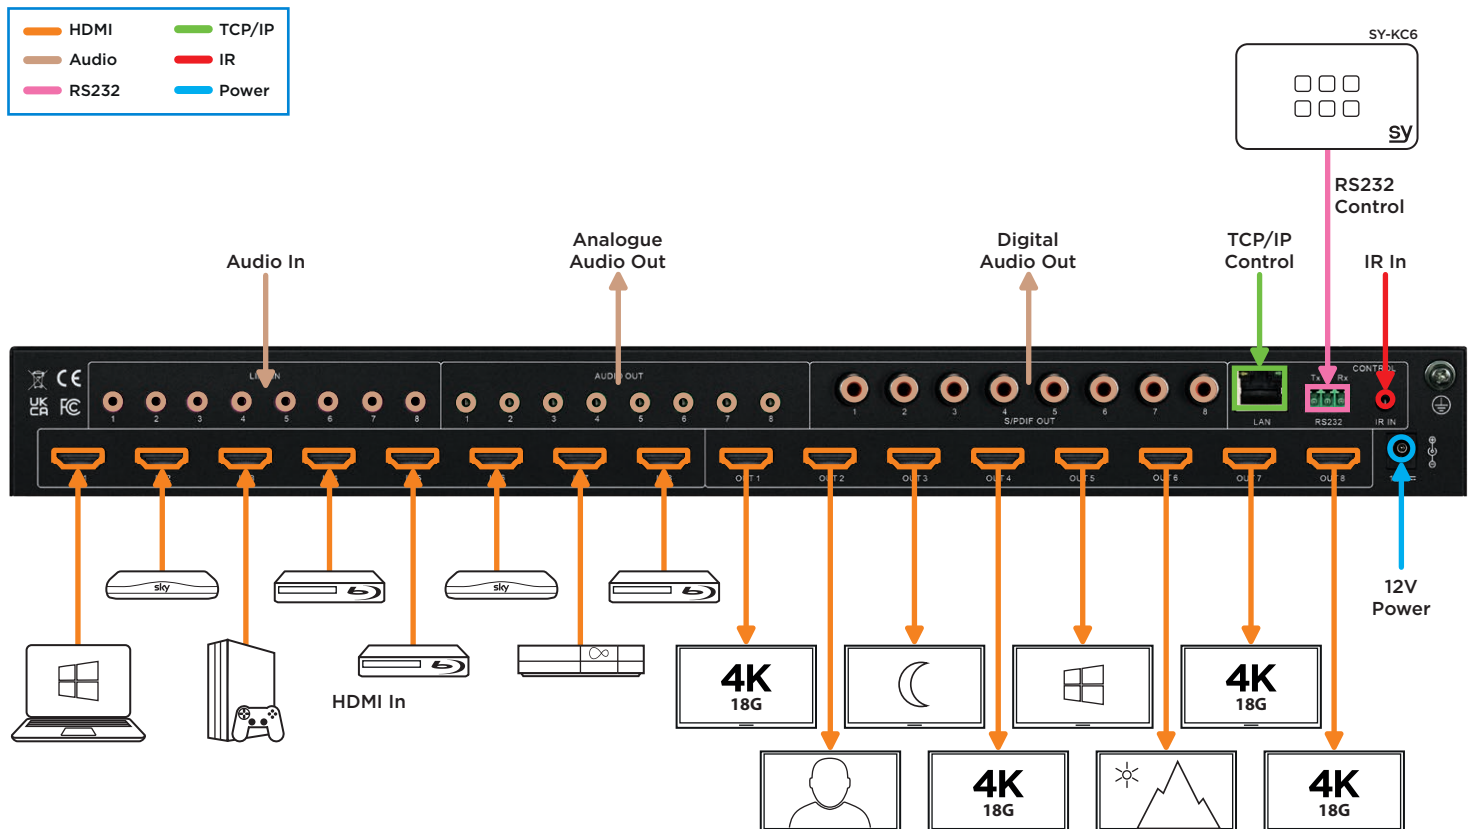

SPECIFICATIONS

PART NUMBER	SY-MSU88-18G	
VIDEO RESOLUTIONS/FORMATS	VESA and SMPTE 480p to 2160p (4K UHD). All resolutions to: 4096x2160p @60Hz 4:2:0 8bit, 3840x2160p @30Hz 4:4:4 8bit. All PC resolutions to 1920x1200	
BANDWIDTH	18Gbps	
HDCP	Compatible with all versions up to 2.2	
INPUTS	Video 8x HDMI type A	Audio 8x Analogue L+R
OUTPUTS	Video 8x HDMI type A	Audio 8x Digital S/PDIF 8x Analogue L+R
CONTROL	IR RS232 TCP/IP Front panel	
POWER SUPPLY	12V DC, X max.	
POWER CONSUMPTION	XW	
WEIGHT AND DIMENSIONS	Weight (net) Xkg	Size (WHD) X x X x Xmm
WHAT'S IN THE BOX	1x MSU44-18G 1x UK Power cable 1x User Manual	

SY-MSU88-18G Data Sheet 01. Details subject to change with no prior notice. ©SY Electronics 2023