



VS-LC101
CaptureVision Station
Instructions on live streaming

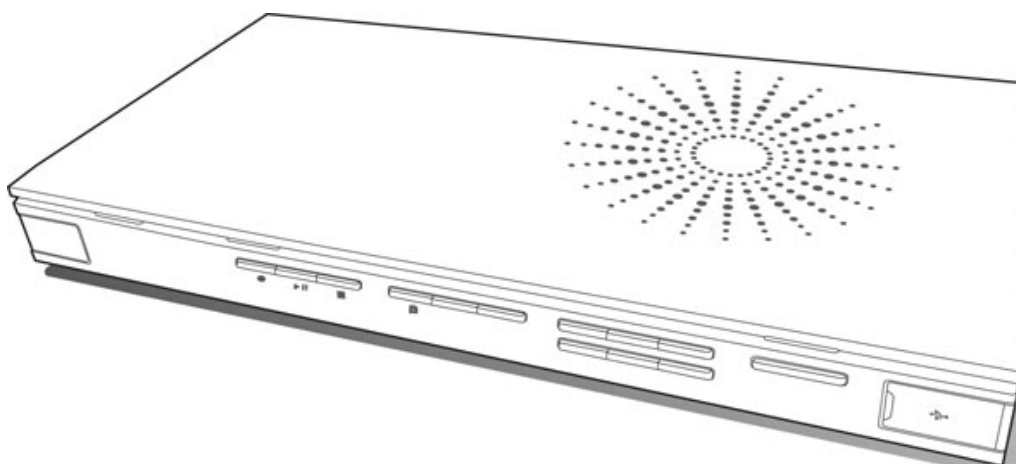

Chapter 1 How to live stream


This product supports live events online. It allows you to live stream via YouTube online. The steps are as follow:

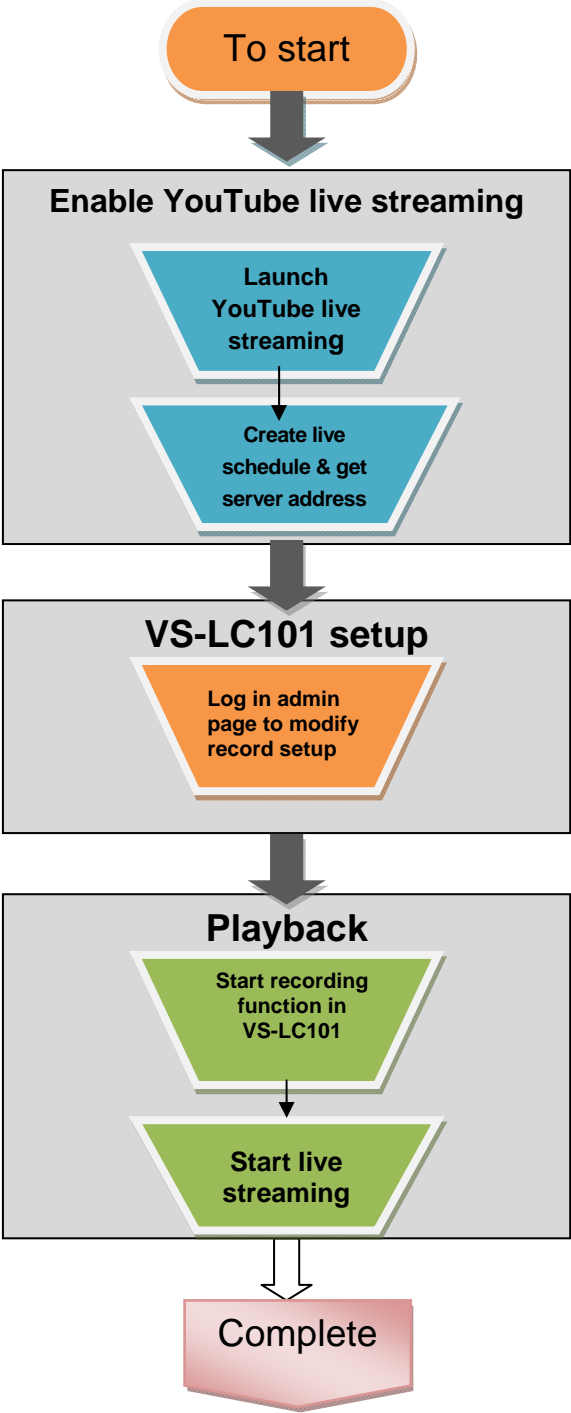


Chapter 2 Live streaming setup

2.1 Enable the YouTube live streaming

- Log in your YouTube account
- Select [My Channel] => [Video Manager]

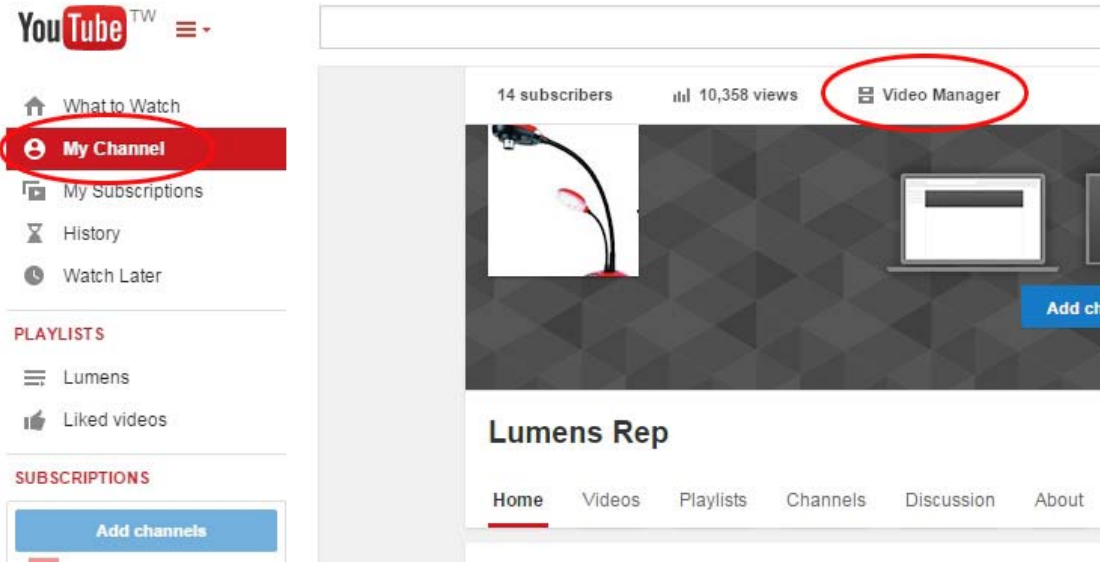

- Click [Live Events] => [Enable live streaming]

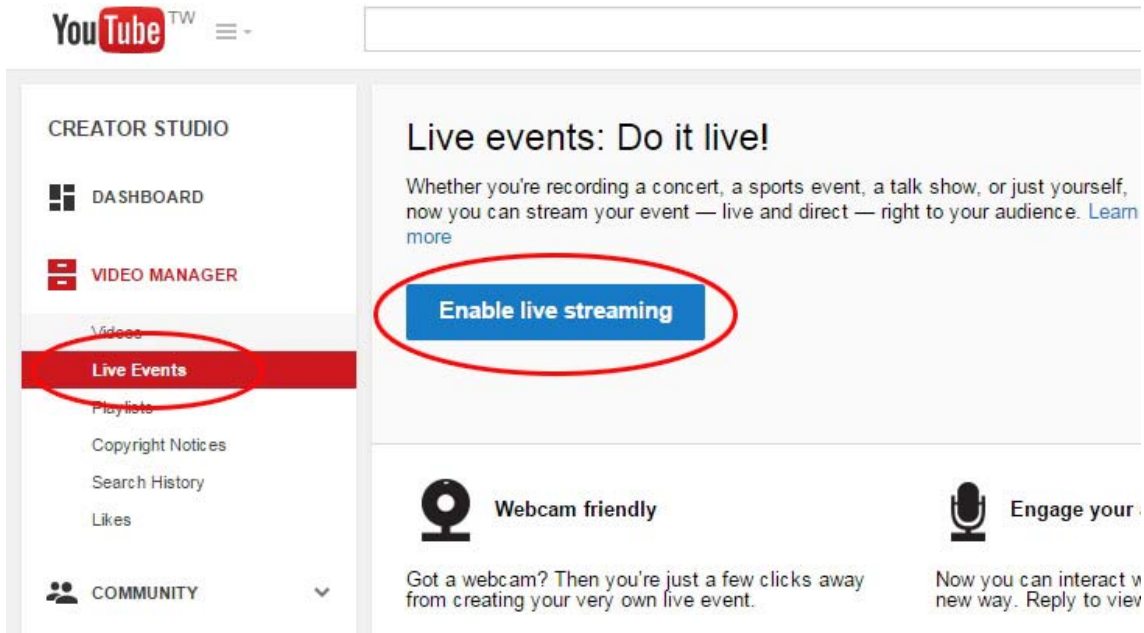

- To complete the account verification, select how you like to receive the verification code and enter your mobile phone number

Account verification (step 1 of 2)

Verifying your account by phone lets you unlock additional features on YouTube, and h

Select your country

United States

How should we deliver the verification code to you?

Call me with an automated voice message

Text me the verification code

Which language should we use to send you the verification code?

English (US) [change language](#)

What is your phone number?

Please input a valid phone number.

For example: (201) 555-5555

Important: Up to two accounts can be verified per phone number, per year.

- Enter the verification code received to complete the process

Account verification (step 2 of 2)


A text message with your verification code has been sent

If you don't get the text message, try going back and selecting a different delivery method.


Enter your 6-digit verification code

2.2 Create a live event

- Create a live event (Schedule a new event)

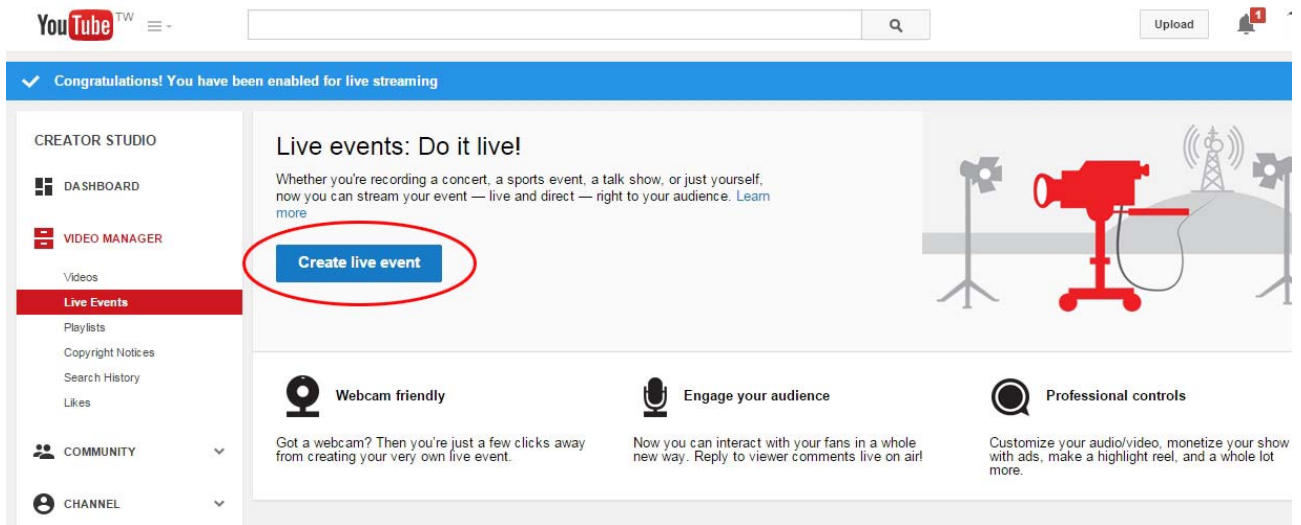

- Select the [Custom] Type, then enter the start time, end time and title of the event and click [Create event].

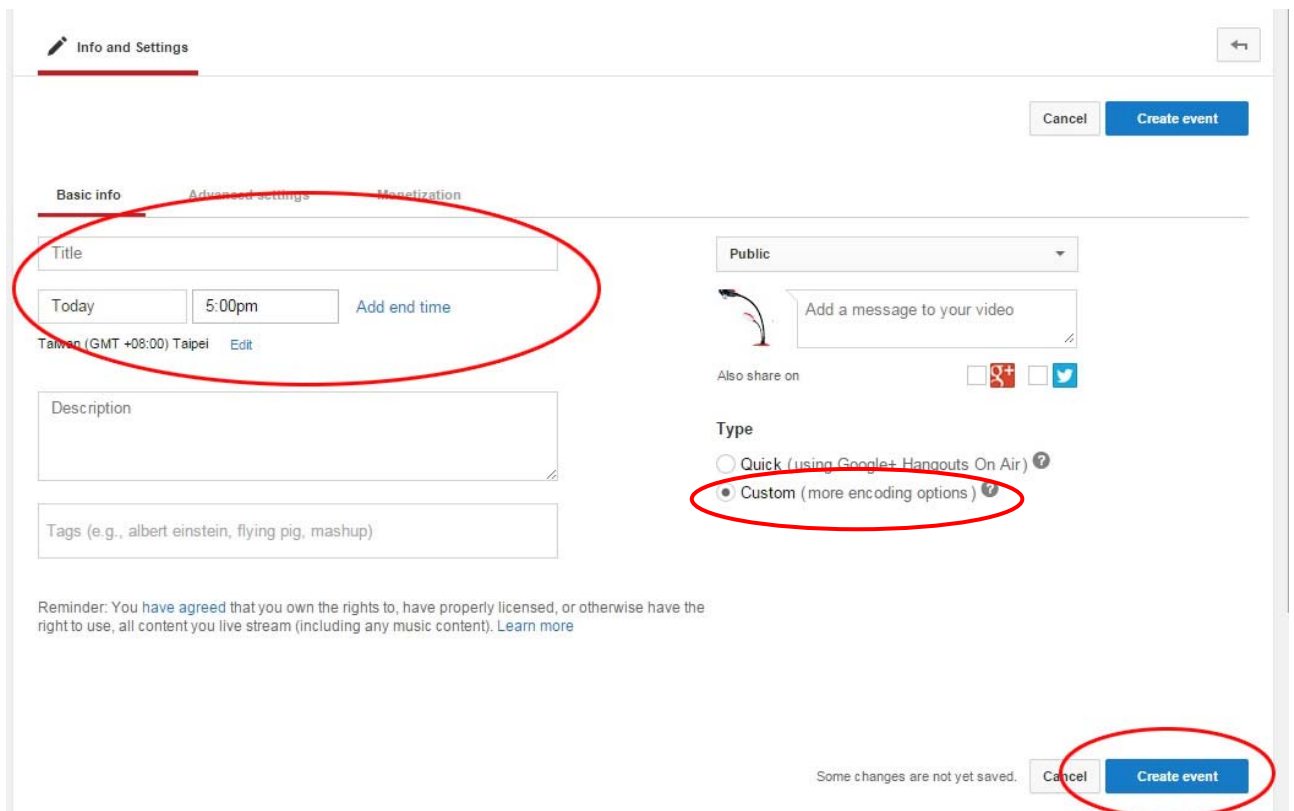


- Select a basic ingestion bitrate in the content capture setup. Any bitrate larger than 720P is not suggested
- Select [Other encoders] under [Select encoder].

Already have Wirecast for YouTube? Get the version 5 update for [Mac](#) [Windows](#)

VS-LC101 Live

Main Camera Add a Camera

Thumbnail



Please upload as large an image as possible (suggested: 1280x720) since the image is embedded on other sites. You can upload a JPG, GIF, BMP, or PNG file. Maximum size is 10MB.

Choose maximum sustained bitrate of your encoder *
 Select a range that corresponds to the maximum sustained output your encoder provides.

Basic ingestion

 Custom ingestion ?

- Below [Copy and paste into your encoder] are [Stream Name] and [Primary Server URL]. Copy the data in the two sections and paste into VS-LC101

2. Copy and paste into your encoder

Enter the stream names and URLs in the configuration options of your en

Stream Name

LadibugUS.699x-hhaw-cwmb-78w1

Primary Server URL


rtmp://a.rtmp.youtube.com/live2


2.3 Configure VS-LC101

- Open a web and log in the VS-LC101's System Administration page
- Select [Record Setting] page and modify the setting as below

Streaming Mode: WebCasting


Encode Profile: Dynamic Scene SD (720x480). This setup need to match your setup [Basic ingestion] in YouTube

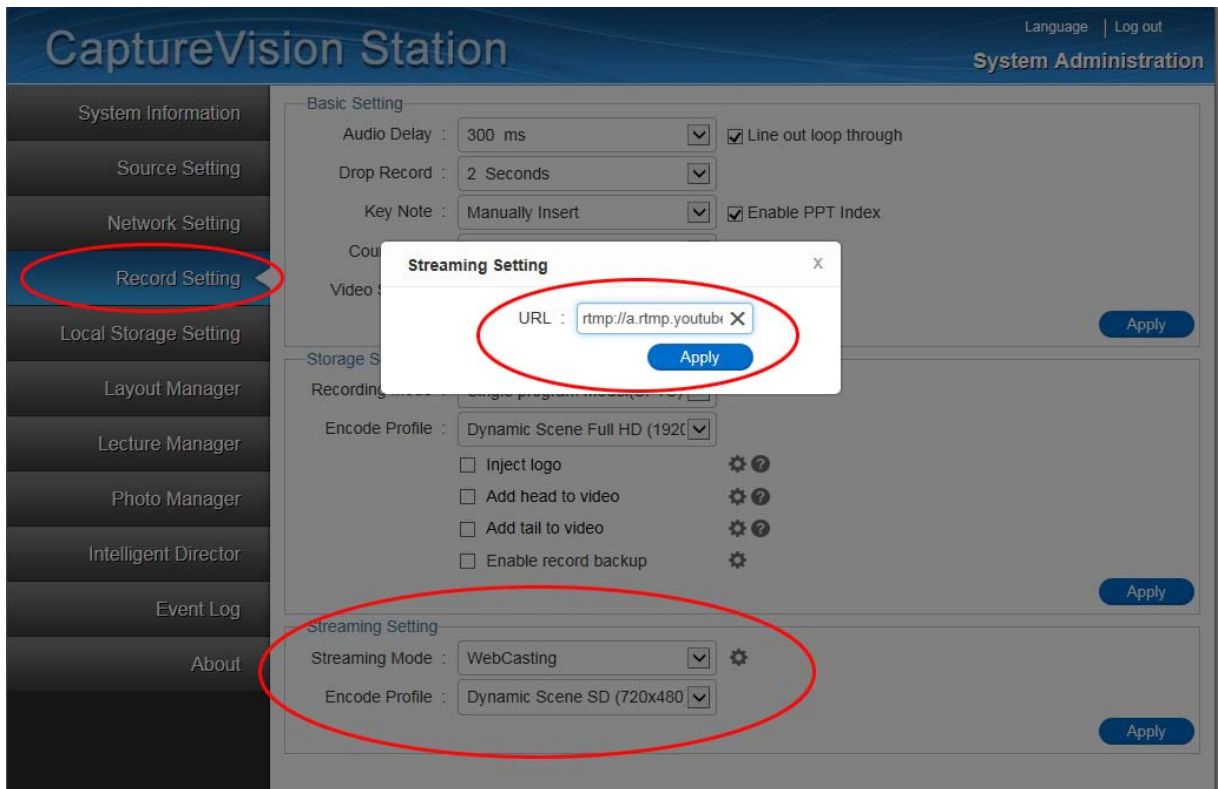


- Click  to enter the primary server URL and stream name, e.g. <rtmp://a.rtmp.YouTube.com/live2/LadibugUS.k6k4-qgsj-vq32-46mw>
- Log out of the System Administration page
- Start recording function in VS-LC101 using online directing or a remote controller

2.4 Start live streaming

- Go back to YouTube's [Video manager] and open [Live Control Room]. You can take a preview on this page and start live streaming

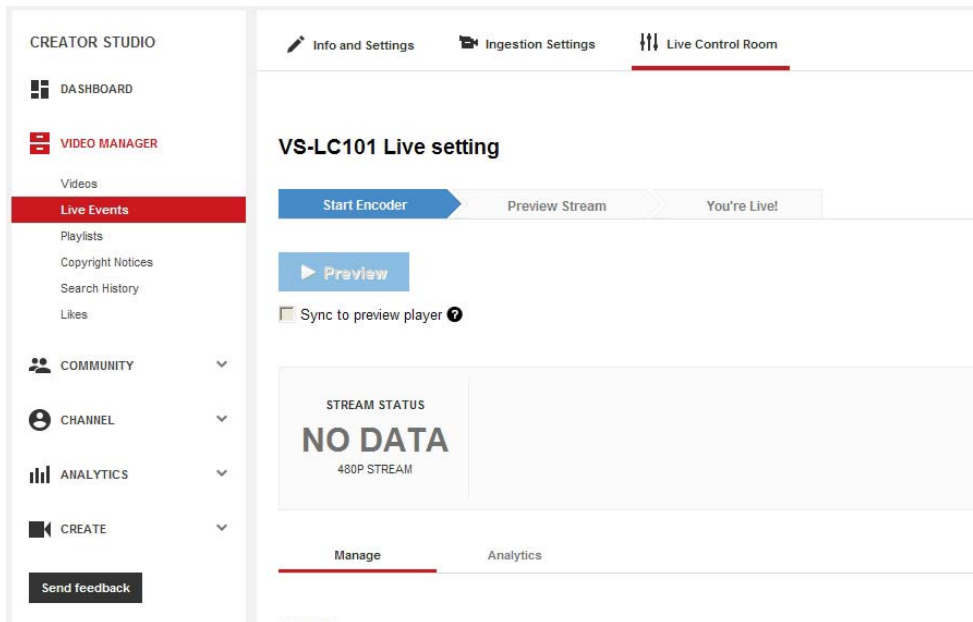

- Go back to [My Channel] and you can see the scheduled stream setting on the right

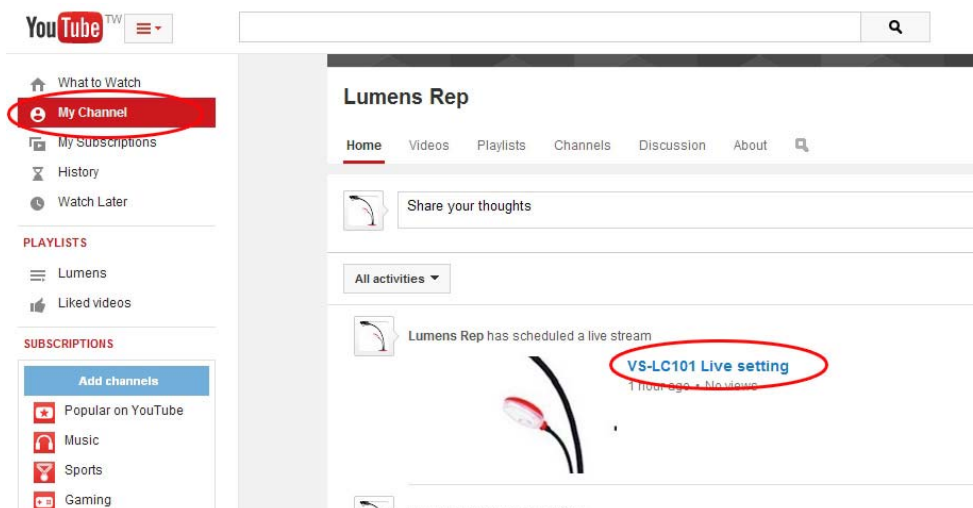

- Click on it and select [Share] to see links for sharing. This link is provided to allow other users to watch this channel

